

FOCUSLITE[®]



XTD-4T



ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE[®]



XTD-4T-2



ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®



XTD-9T



ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®



XTD-3T




ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®

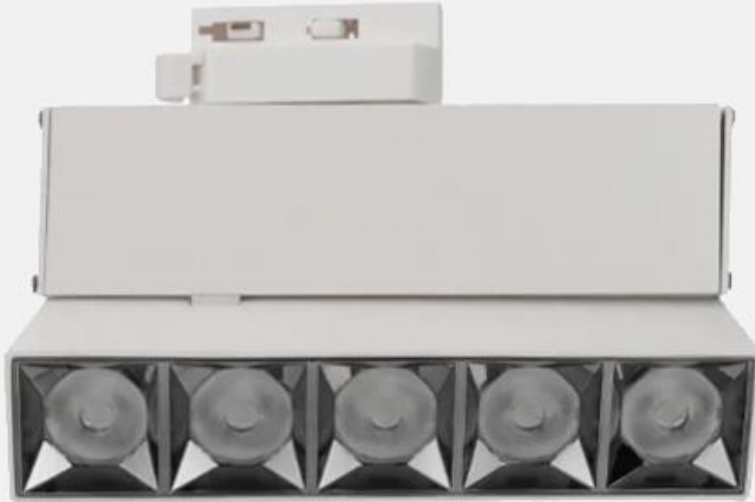

XTD-5T



ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®

FCS-guide rail Jiugongge lamp

Description:

Guide rail linear light (adjustable angle)

Surface treatment: sand white

Material/process: aluminum/integrated die-casting

Voltage: ADC12

Anti-glare cover color: gun black

Beam angle: 15° 24° 38° 50° /50x50° 70x70° 35x70°

Compatible light source: SMD 5050 (Osram/Cree)

SPECIFICATIONS

Lamp model	XTD-4T	XTD-4T-2	XTD-9T	XTD-3T	XTD-5T
diameter	120MM	205MM	160MM	118MM	193MM
Height	180MM	180MM	180MM	145MM	145MM
Power	16W	2*16W	30W	12W	20W
Beam angle of light	15° /24° /38° /50° /50x50° /70x70° /35x70°				



ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai UAE