

# FOCUSLITE®

---



ISO 9001:2000




Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai  
UAE

# FOCUSLITE®

---

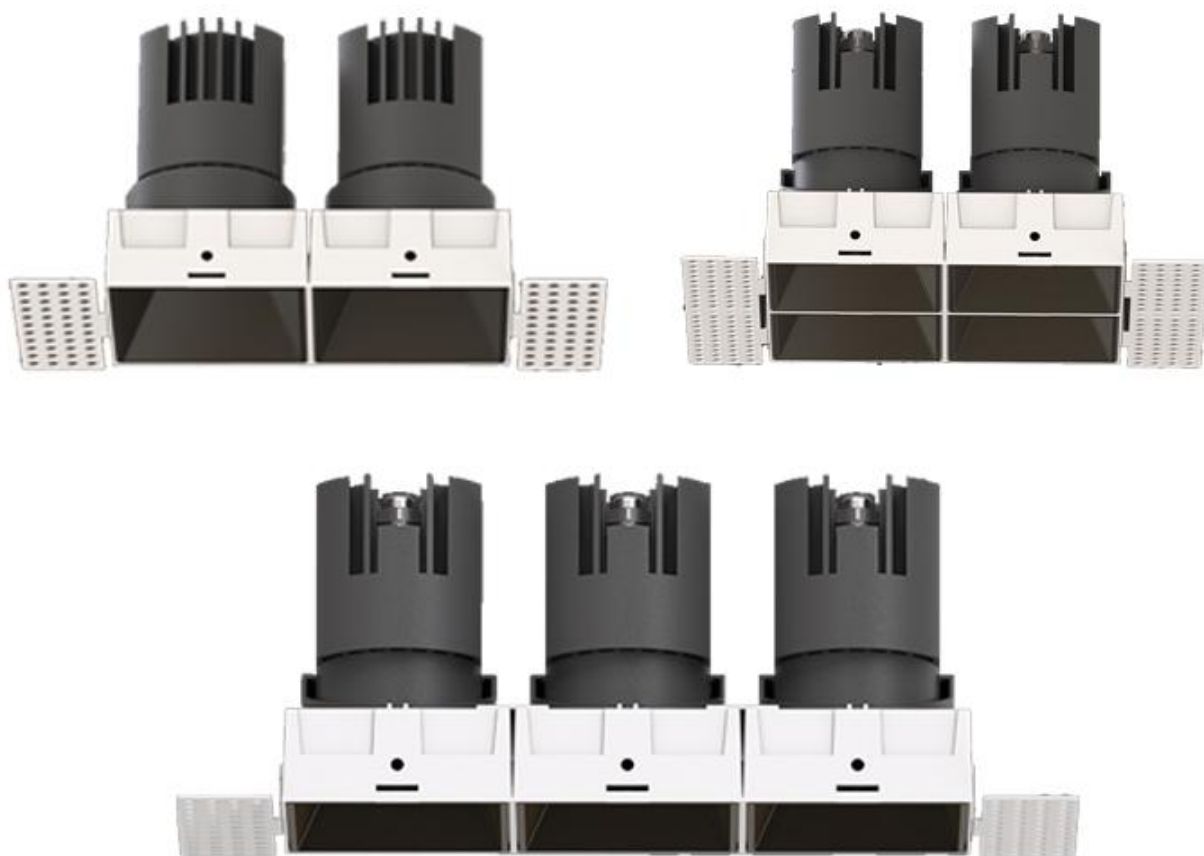

ISO 9001:2000




Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai  
UAE

## Unique design

Die-cast aluminum housing for improved heat dissipation

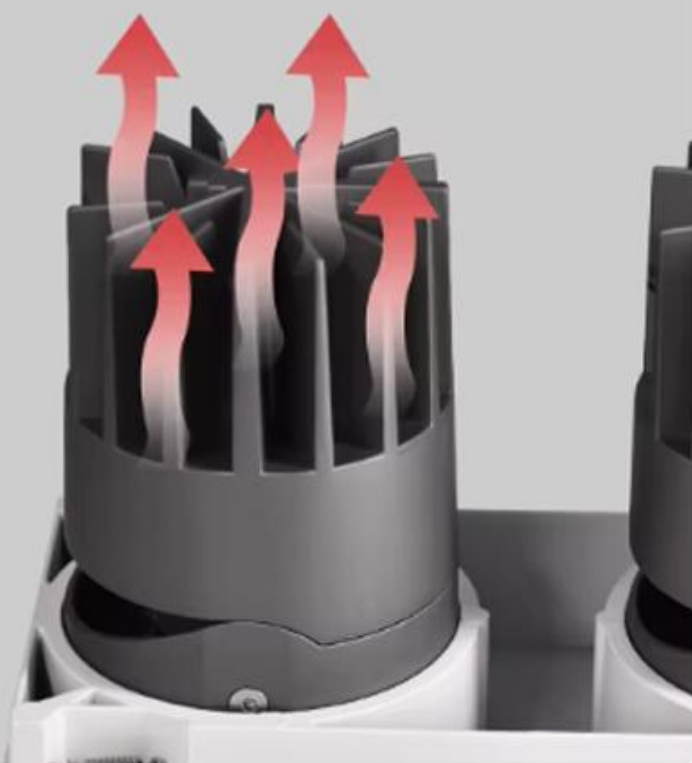


ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai  
UAE

# FOCUSLITE<sup>®</sup>

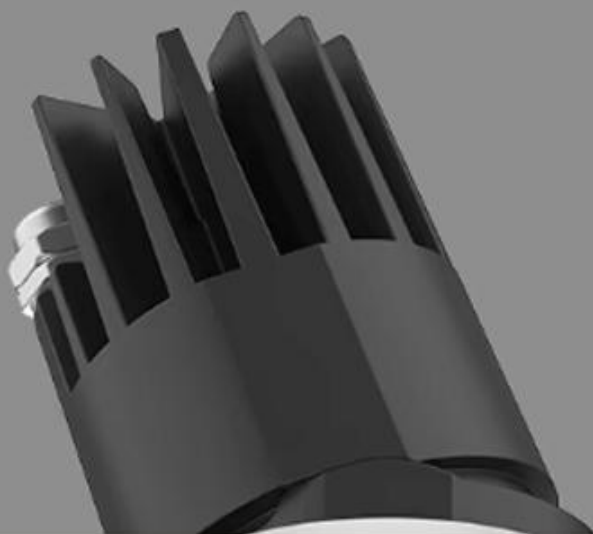

**InBright**



350°



30°

Adjustable



ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai  
UAE

W downlight series splicing combination spotlight

Description:

Recessed spotlight (adjustable/non-adjustable angle); UGR < 16; Surface treatment: surface ring sand white, radiator oil injection/gray; Material/Process: Die-cast aluminum; Power supply: ADC12; Reflector Color: Gun Black/Mirror Silver; Adapted light source bracket: 1816; Special bracket Remarks: 1507/020 can be used after drilling; Special reflector color: white cup/matte black cup/sand silver cup/gold cup can be customized.

SPECIFICATIONS

Lamp model	W314-2	W314-3	W314-4	W315-2	W315-3	W315-4
with or without border	No	Yes/No	Yes/No	No	No	
Diameter	159*87	230*87	159*159	202*110	292*110	202*202
Opening	75*145/73*148	75*215/73*222	150*145/145*149	95*185/94*188	95*275/94*188	185*190/94*279
Height	105.2	105.2	105.2	131.4	131.4	131.4
Power	2*12	3*12	4*12	2*20	3*20	4*20
Luminous surface	11mm	11mm	11mm	11/14mm	14/17mm	14/17mm
Beam angle of light	15° /24° /38°					



ISO 9001:2000

