



FOCUSLITE®

LED FLOODLIGHT

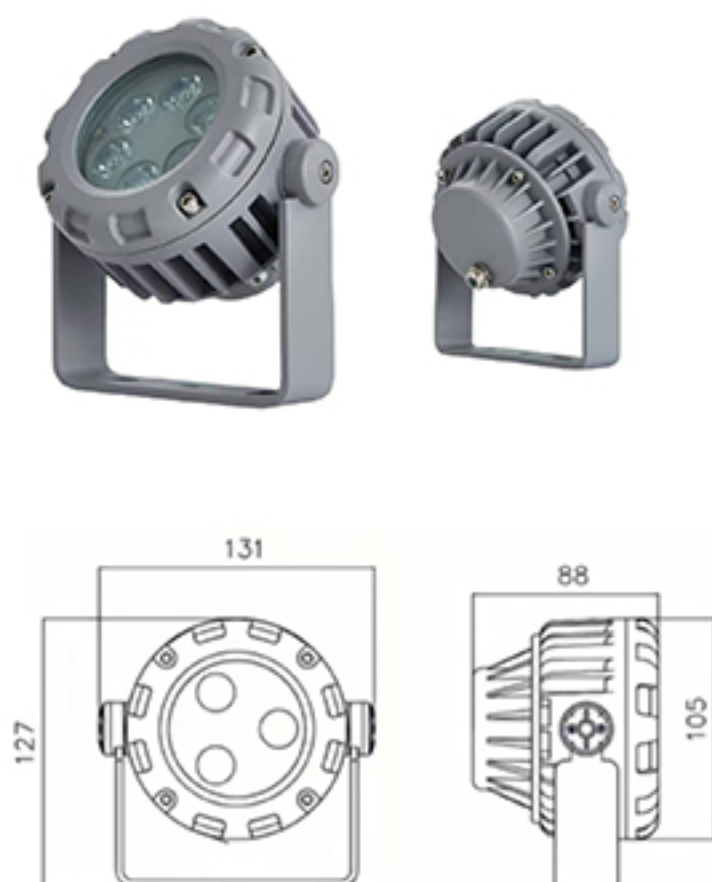

Lamp model:	FCS-F9P6WA
Input Wattage:	6W
Input voltage:	DC24V/AC220V
Related CCT:	Single color/RGBW
Material:	Aluminum 6063
Housing color:	Aluminum Oxide/custom color
Beam angle:	8°/10°/12°/ 15° / 20° /30°/ 45°/ 60°
Output lumen:	80-100LM/W
CRI:	75<Ra<85
Adjustable angle:	0~180°
LED source:	LED
IP Rating:	IP65
Operate working temperature:	-25~+60 °C
Stock temperature:	-30~+65 °C
Lifespan:	50,000 H
Product size:	131*88*127mm
Factor:	≥0.85
Power efficiency:	≥90%
Electric Shock Classification:	II Class
Controll way:	uncontrollable

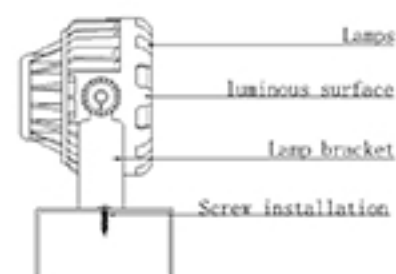

Installation Illustration




ISO 9001:2000




Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

LED FLOODLIGHT

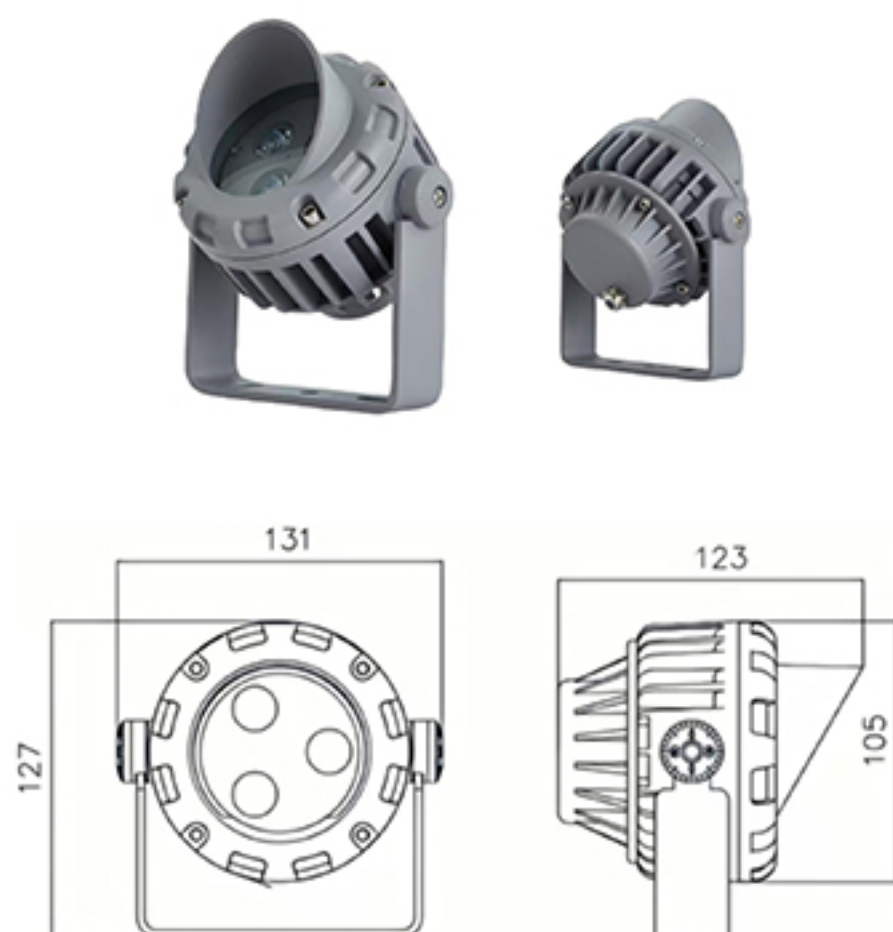

Lamp model:	FCS-F9P6WA
Input Wattage:	6W
Input voltage:	DC24V/AC220V
Related CCT:	Single color/RGBW
Material:	Aluminum 6063
Housing color:	Aluminum Oxide/custom color
Beam angle:	8°/10°/12°/ 15° / 20° /30°/ 45°/ 60°
Output lumen:	80-100LM/W
CRI:	75<Ra<85
Adjustable angle:	0~180°
LED source:	LED
IP Rating:	IP65
Operate working temperature:	-25~+60 °C
Stock temperature:	-30~+65 °C
Lifespan:	50,000 H
Product size:	131*123*127mm
Factor:	≥0.85
Power efficiency:	≥90%
Electric Shock Classification:	II Class
Controll way:	uncontrollable

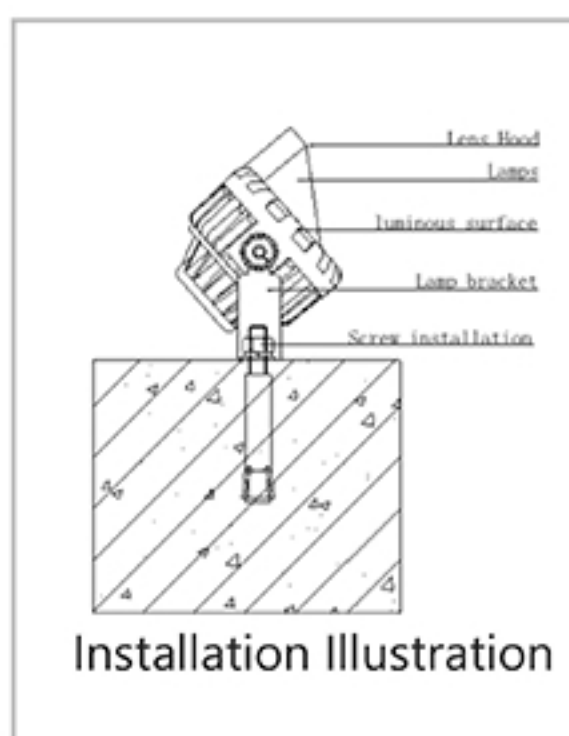

ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE