






Lamp model:	FCS-L23
Input Wattage:	12/15W
Input voltage:	DC24V
Related CCT:	Single color/ RGB/W
Material:	Aluminum +PMMA
Housing color:	grey
Beam angle:	120°
Output lumen:	80-100LM/W
CRI:	75 <ra<85< td=""></ra<85<>
Adjustable angle:	0~120°

LED source: IP Rating: — Operate working temperature: -25~+60 °C

Operate working temperature:  $-30 \sim +65$  °C Stock temperature: -50,000 H Product size: L1000/500/300\*W23\*H31mm

≥0.85 Factor: -Power efficiency: ≥90% Electric Shock Classification: II Class

Controll way: single color/DMX512

























Lamp model: — FCS-LN24 Input Wattage: 12/15W Input voltage: \_\_\_\_\_\_ DC24V Input voltage:

Related CCT:


Single color/ RGB/W
Material

Aluminum +PMMA Housing color: \_\_\_\_\_ grey Beam angle: 120° Output lumen: 80-100LM/W 75<Ra<85 CRI:-Adjustable angle: 0~270° LED source: CREE IP Rating: IP65 Operate working temperature:

Stock temperature:

-30~+65 °C

50,000 H Product size: L1000/500/300\*W24\*H50mm ≥0.85 Factor: -Power efficiency: ≥90% Electric Shock Classification: II Class single color/DMX512 Controll way: -

























Lamp model: FCS-W17 Input Wattage: 12/15W Input voltage: \_\_\_\_\_\_ DC24V

Input voltage:

Related CCT:

Single color/ RGB/W
Material

Aluminum +PMMA

Housing color: \_\_\_\_\_ grey


Output lumen: 80-100LM/W 75<Ra<85 CRI:-Adjustable angle: 0~120° LED source: CREE IP Rating: IP65

Operate working temperature: -25~+60 °C Stock temperature:  $-23 \times 65$  °C lifespan:  $-30 \times 65$  °C

Product size: L1000/500/300\*W17\*H30mm

≥0.85 Factor: -Power efficiency: ≥90% Electric Shock Classification: II Class

single color/DMX512 Controll way:—



























Lamp model:  Input Wattage:  Input voltage:  Related CCT:  Material:  Housing color:  Beam angle:  Output lumen:  CRI:  Adjustable angle:  LED source:  IP Rating:  Operate working temperature:  Stock temperature:  Lifespan:  Product size:  Factor:  Power efficiency:	12/15W DC24V Single color/ RGB/W Aluminum +PMMA grey 120° 80-100LM/W 75 < Ra < 85 0~120° CREE IP65 -25~+60°C -30~+65°C 50,000 H L1000/500/300*W20*H45mm ≥0.85 ≥90%
	≥90%
Controll way:	single color/DMX512
























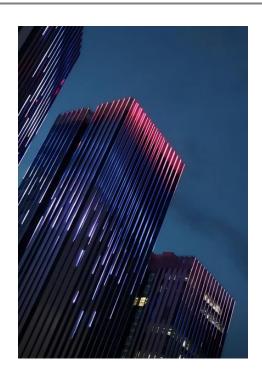


Lamp model: FCS-W30 Input Wattage: 12/15W Input voltage: \_\_\_\_\_\_ DC24V Input voltage:

Related CCT:

Single color/ RGB/W
Material

Aluminum +PMMA Housing color: \_\_\_\_\_ grey Output lumen: 80-100LM/W 75<Ra<85 CRI:-Adjustable angle: 0~270° LED source: CREE IP Rating: IP65 Operate working temperature: -25~+60 °C Stock temperature:  $-23 \times 65$  °C lifespan:  $-30 \times 65$  °C Product size: L1000/500/300\*W30\*H48mm ≥0.85 Factor: \_ Power efficiency: ≥90% Electric Shock Classification: II Class single color/DMX512





Controll way:—













