

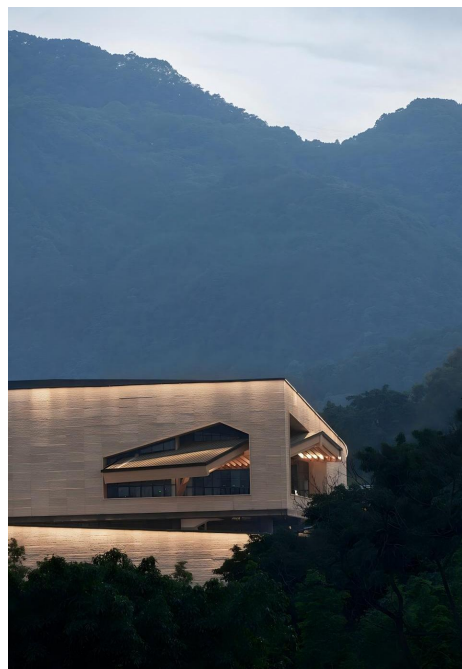


FOCUSLITE®

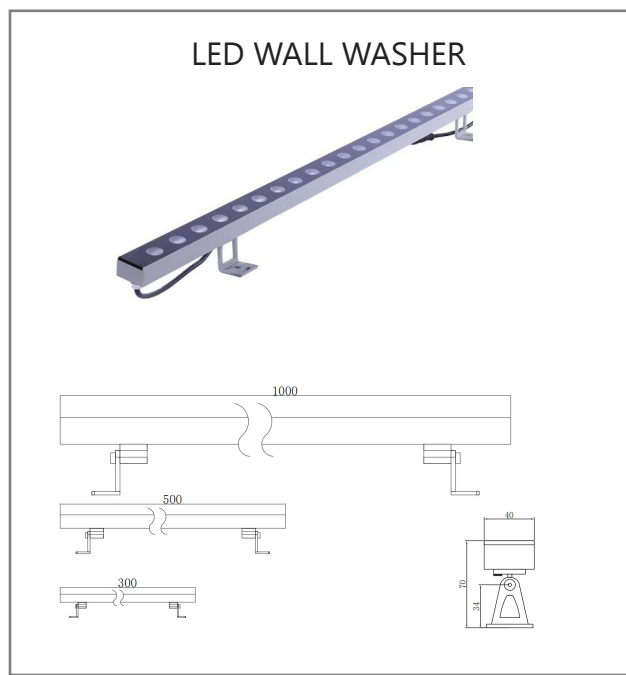

Lamp model:	FCS-W40-18W
Input Wattage:	18W
Input voltage:	DC24V
Related CCT:	2200K-6500K/ RGB-W
Material:	Aluminum 6063
Housing color:	Aluminum alloy+tempered glass
Beam angle:	10°/60° / 45°/25°
Output lumen:	80-120LM/W
CRI:	75<Ra<85
Adjustable angle:	0~180°
LED source:	CREE
IP Rating:	IP67
Operate working temperature:	-25~+60 °C
Stock temperature:	-30~+65 °C
Lifespan:	50,000 H
Product size:	L1000/500/300*W40*H70
Factor:	≥0.85
Power efficiency:	≥90%
Electric Shock Classification:	II Class
Controll way:	Single/DMX512

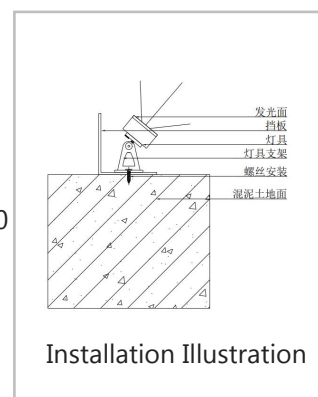


ISO 9001:2000




Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®

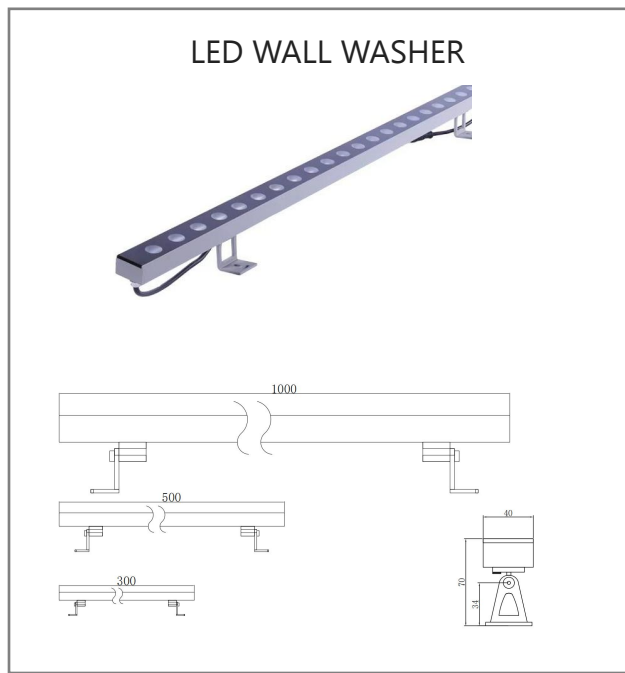

Lamp model:	FCS-W40-18W
Input Wattage:	18W
Input voltage:	DC24V
Related CCT:	2200K-6500K/ RGB-W
Material:	Aluminum 6063
Housing color:	Aluminum alloy+tempered glass
Beam angle:	10°/60° / 45°/25°
Output lumen:	80-120LM/W
CRI:	75<Ra<85
Adjustable angle:	0~180°
LED source:	CREE
IP Rating:	IP67
Operate working temperature:	-25~+60 °C
Stock temperature:	-30~+65 °C
Lifespan:	50,000 H
Product size:	L1000/500/300*W40*H70
Factor:	≥0.85
Power efficiency:	≥90%
Electric Shock Classification:	II Class
Controll way:	Single/DMX512

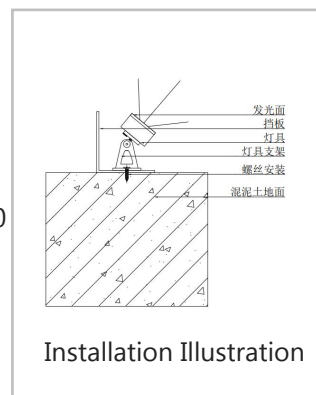



ISO 9001:2000




Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®

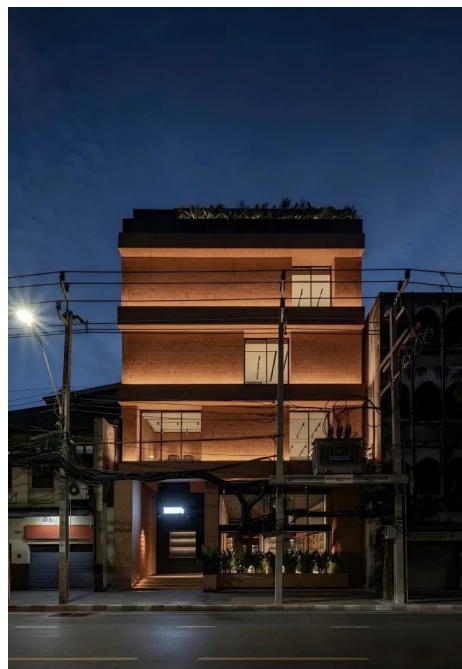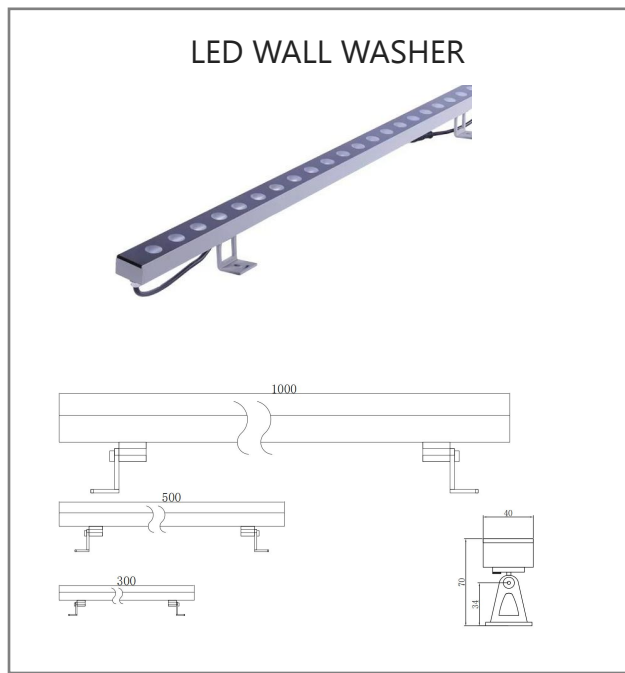

Lamp model:	FCS-W40-36W
Input Wattage:	36W
Input voltage:	DC24V
Related CCT:	2200K-6500K/ RGB-W
Material:	Aluminum 6063
Housing color:	Aluminum alloy+tempered glass
Beam angle:	10°/60° / 45°/25°
Output lumen:	80-120LM/W
CRI:	75<Ra<85
Adjustable angle:	0~180°
LED source:	CREE
IP Rating:	IP67
Operate working temperature:	-25~+60 °C
Stock temperature:	-30~+65 °C
Lifespan:	50,000 H
Product size:	L1000/500/300*W40*H70
Factor:	≥0.85
Power efficiency:	≥90%
Electric Shock Classification:	II Class
Controll way:	Single/DMX512

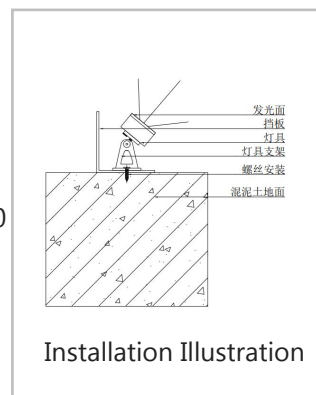

ISO 9001:2000




Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427


Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®

LED WALL WASHER

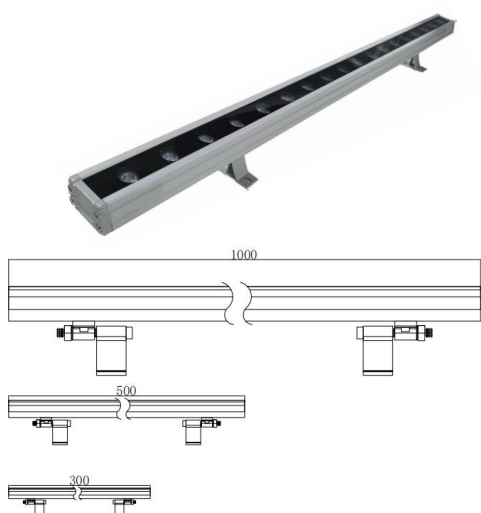

Lamp model:	FCS-W49-18W
Input Wattage:	18W
Input voltage:	DC24V
Related CCT:	2200K-6500K/ RGB-W
Material:	Aluminum 6063
Housing color:	Aluminum alloy+tempered glass
Beam angle:	10°/60° / 45°/25°
Output lumen:	80-120LM/W
CRI:	75<Ra<85
Adjustable angle:	0~180°
LED source:	CREE
IP Rating:	IP67
Operate working temperature:	-25~+60 °C
Stock temperature:	-30~+65 °C
Lifespan:	50,000 H
Product size:	L1000/500/300*W49*H33
Factor:	≥0.85
Power efficiency:	≥90%
Electric Shock Classification:	II Class
Controll way:	DMX512



Installation Illustration



ISO 9001:2000




Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427


Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®

LED WALL WASHER

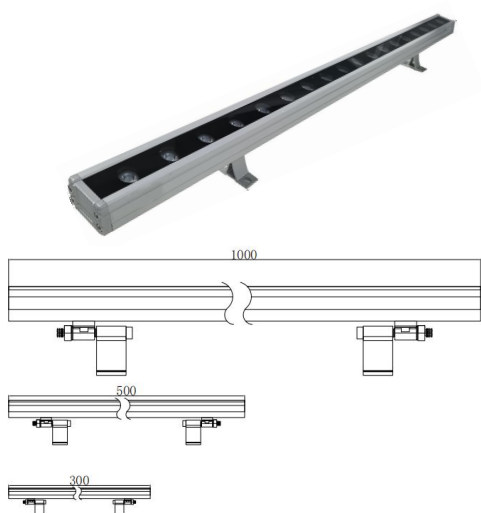

Lamp model:	FCS-W49-24W
Input Wattage:	24W
Input voltage:	DC24V
Related CCT:	2200K-6500K/ RGB-W
Material:	Aluminum 6063
Housing color:	Aluminum alloy+tempered glass
Beam angle:	10°/60° / 45°/25°
Output lumen:	80-120LM/W
CRI:	75<Ra<85
Adjustable angle:	0~180°
LED source:	CREE
IP Rating:	IP67
Operate working temperature:	-25~+60 °C
Stock temperature:	-30~+65 °C
Lifespan:	50,000 H
Product size:	L1000/500/300*W49*H33
Factor:	≥0.85
Power efficiency:	≥90%
Electric Shock Classification:	II Class
Controll way:	DMX512



Installation Illustration



ISO 9001:2000




Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427


Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®

LED WALL WASHER

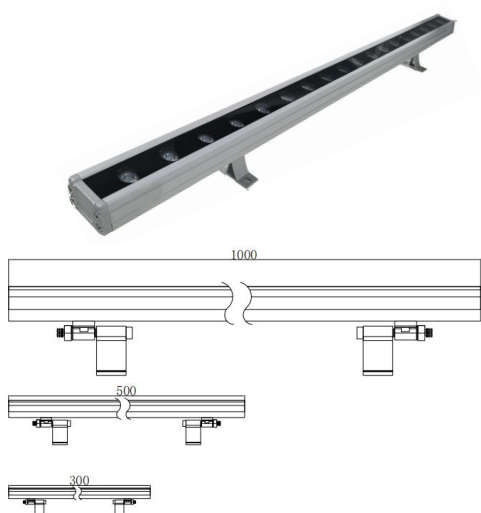

Lamp model:	FCS-W49-36W
Input Wattage:	36W
Input voltage:	DC24V
Related CCT:	2200K-6500K/ RGB-W
Material:	Aluminum 6063
Housing color:	Aluminum alloy+tempered glass
Beam angle:	10°/60° / 45°/25°
Output lumen:	80-120LM/W
CRI:	75<Ra<85
Adjustable angle:	0~180°
LED source:	CREE
IP Rating:	IP67
Operate working temperature:	-25~+60 °C
Stock temperature:	-30~+65 °C
Lifespan:	50,000 H
Product size:	L1000/500/300*W49*H33
Factor:	≥0.85
Power efficiency:	≥90%
Electric Shock Classification:	II Class
Controll way:	DMX512



Installation Illustration



ISO 9001:2000




Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427


Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®

LED WALL WASHER

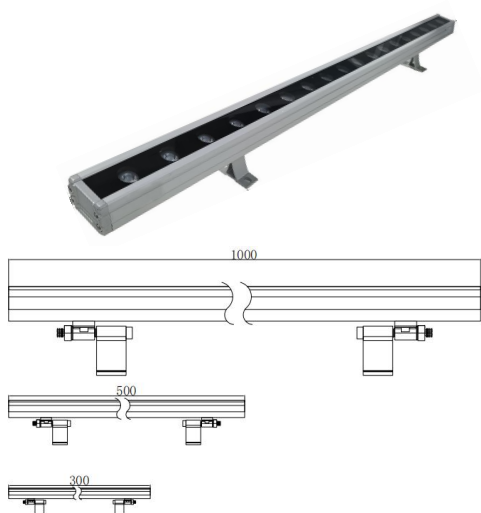

Lamp model:	FCS-W49-48W
Input Wattage:	48W
Input voltage:	DC24V
Related CCT:	2200K-6500K/ RGB-W
Material:	Aluminum 6063
Housing color:	Aluminum alloy+tempered glass
Beam angle:	10*60° / 45*25°
Output lumen:	80-120LM/W
CRI:	75<Ra<85
Adjustable angle:	0~180°
LED source:	CREE
IP Rating:	IP67
Operate working temperature:	-25~+60 °C
Stock temperature:	-30~+65 °C
Lifespan:	50,000 H
Product size:	L1000/500/300*W49*H33
Factor:	≥0.85
Power efficiency:	≥90%
Electric Shock Classification:	II Class
Controll way:	DMX512



Installation Illustration



ISO 9001:2000




Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427


Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®

LED WALL WASHER

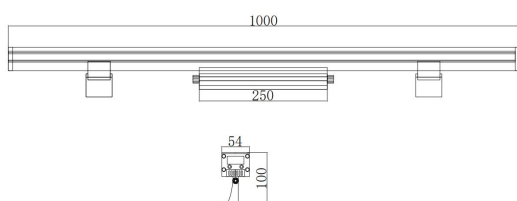

Lamp model:	FCS-W54-68W
Input Wattage:	68W
Input voltage:	220VAC & DC24V
Related CCT:	Single color
Material:	Aluminum 6063
Housing color:	Aluminum alloy+tempered glass
Beam angle:	10°/60° / 45°/25°
Output lumen:	80-120LM/W
CRI:	75<Ra<85
Adjustable angle:	0~180°
LED source:	CREE
IP Rating:	IP65
Operate working temperature:	-25~+60 °C
Stock temperature:	-30~+65 °C
Lifespan:	50,000 H
Product size:	L1100*W54*H100mm
Factor:	≥0.85
Power efficiency:	≥90%
Electric Shock Classification:	II Class
Controll way:	uncontrollable



Installation Illustration



ISO 9001:2000




Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427


Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai UAE

FOCUSLITE®

LED WALL WASHER

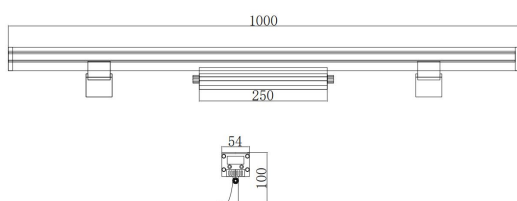

Lamp model:	FCS-W54-72W
Input Wattage:	72W
Input voltage:	220VAC & DC24V
Related CCT:	Single color
Material:	Aluminum 6063
Housing color:	Aluminum alloy+tempered glass
Beam angle:	10°/60° / 45°/25°
Output lumen:	80-140LM/W
CRI:	75<Ra<85
Adjustable angle:	0~180°
LED source:	CREE
IP Rating:	IP65
Operate working temperature:	-25~+60 °C
Stock temperature:	-30~+65 °C
Lifespan:	50,000 H
Product size:	L1200*W54*H100mm
Factor:	≥0.85
Power efficiency:	≥90%
Electric Shock Classification:	II Class
Controll way:	uncontrollable



Installation Illustration



ISO 9001:2000




Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427


Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®

LED WALL WASHER

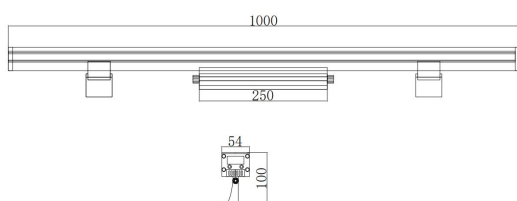

Lamp model:	FCS-W54-90W
Input Wattage:	90W
Input voltage:	220VAC & DC24V
Related CCT:	Single color
Material:	Aluminum 6063
Housing color:	Aluminum alloy+tempered glass
Beam angle:	10°/60° / 45°/25°
Output lumen:	80-150LM/W
CRI:	75<Ra<85
Adjustable angle:	0~180°
LED source:	CREE
IP Rating:	IP65
Operate working temperature:	-25~+60 °C
Stock temperature:	-30~+65 °C
Lifespan:	50,000 H
Product size:	L1500*W54*H100mm
Factor:	≥0.85
Power efficiency:	≥90%
Electric Shock Classification:	II Class
Controll way:	uncontrollable



Installation Illustration



ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE